

EVO 165 P SUB - 750

EXPERIENCE THE **EVOLUTION**


GreenMech



EVO 165

GreenMech
EVO SERIES

EVO 165

WE LISTENED, WE WORKED & WE MADE IT AWESOME

The **EVO** 165 represents everything that's evolutionary in a chipper. We've listened to the industry and used all our design and manufacturing experience to develop the machine that will deliver exactly what you've been looking for.

- ▶ **MORE** AGGRESSIVE TORQUE
- ▶ **MORE** AGGRESSIVE BITE
- ▶ **MORE** THROUGHPUT

FEATURES & BENEFITS

INFEED AREA:

► WIDE IN-FEED CHUTE

Reduces the time needed with the saw and helps prevent the inadvertent triggering of the safety bar when feeding in wide branches.

► LETTER BOX SHAPED IN-FEED THROAT

Offers the advantage of getting the forked material into the processor before bridging the sides of the throat.

► HORIZONTAL ROLLERS

Gather and grip the material whilst offering a smooth flow into the processor with reduced lateral movement.

► PIVOTALLY -MOUNTED TOP ROLLER


A pivotally-mounted top roller allows for free movement of timber, offered at different angles, without jamming.

► MANUAL ROLLER LIFT

The top roller pivot arm has been designed with a port that will accommodate a bar, allowing the roller to be manually lifted to gain clearance if required.

► FLOATING SAFETY BARS

Offers equalised pressure on all touch points of the safety bar and, with the new style bottom bar, helps reduce nuisance tripping.

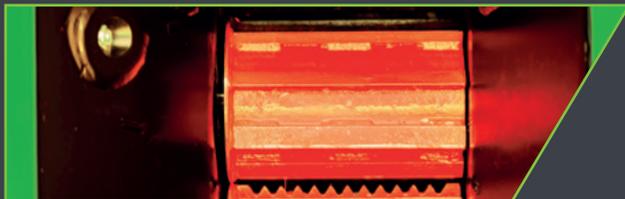

CONTROLS:

► CONTROL BOX LOCATION


Located in a safe and convenient position on top of the in-feed chute, helping centralise the controls of the machine and offering good protection.

► RESET/ REVERSE BUTTONS

Conveniently placed on each side of the infeed chute.

► NO- STRESS SYSTEM

Self manages and retains a required material flow rate through the processor without blocking or stalling the machine.

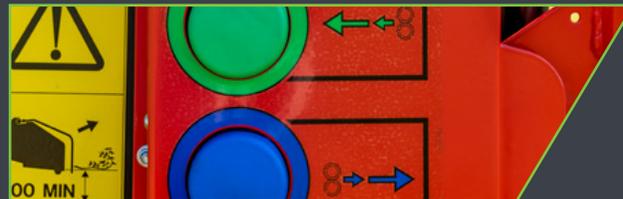

CHIPPING:

► HEAVY FLYWHEEL

At 72kg, the new flywheel offers unparalleled processing power for a machine of its size.

► DISC BLADE TECHNOLOGY

The slicing action of the disc blade system gives the blades more tolerance to the occasional contaminates that find their way into the system and retains an expected life of over 900 hours per set.

► OVERSIZE GREASE-ABLE FLYWHEEL/ DISC BEARINGS

Offers prolonged use of machine without the worry of bearing failure.

► SHARPEN YOUR OWN DISCS

With GreenMech's easy-to use disc blade sharpener.



QUIET POWER:

► NOISE LEVEL

An additional fan provides extra air to the system and allows a lower standard operating speed of the engine, without any loss of efficiency. This reduces fuel consumption and creates a significantly quieter machine.

► 115DB SOUND POWER/92DB SOUND PRESSURE

The hinged steel bonnet, combined with the Disc Blade System and additional fan, creates one of the quietest wood chippers on the market.

► COMPLIANT PETROL ENGINE

The Stage V compliant Briggs and Stratton 37hp petrol engine provides useable power, matched to operational needs, while retaining fuel economy.



MAINTENANCE:

► BLADE MAINTENANCE

Improved access to the flywheel and the special locking system allows for safe and easy maintenance.

► CENTRALISED GREASE POINTS

Offers the convenience of having all of the major grease points in one position, for regular servicing.

► EASE OF SHEAR BAR ACCESS

We have designed the Evo 165 to offer good access to both the vertical and horizontal shear bars.

► ONE PIECE STEEL BONNET

The all steel, one piece, hinged bonnet allows for strength and durability and offers great access.

► UNDERSLUNG PLASTIC TANKS

Offers an “at a glance” view of fuel and hydraulic oil levels.



TOWING:

► LED LIGHTS

Compatible with both 12 and 24 volt systems, the LED lights system will offer a bright lighting that will withstand the normal humps and bumps of our trade.

► REMOVABLE LIGHTING CABLE

Takes away the need to wrap excess cable around the jockey wheel, therefore removing the risk of the cable rubbing on the ground.

► FOLDING INFEED CHUTE

Allows for good visibility of the lighting board in transit and retains a short overall length for storage.



SPECIFICATIONS

EVO 165 P SUB 750

CAPACITY	165mm
ENGINE MAKE	B & S Vanguard
ENGINE OUTPUT	37hp
FUEL	Petrol
CHIPPING FLYWHEEL	Disc type
FLYWHEEL SPEED	1280 rpm
BLADES	4
HYDRAULIC FEED ROLLERS	Twin horizontal
POWER CONTROL	No Stress
FUEL CAPACITY (ENGINE)	33 litres petrol
TYRE SIZE (TOWED)	155/80/R13
TONNES PER HOUR	4.25
INFEEED CHUTE APERTURE	700mm x 1000mm
INFEEED THROAT SIZE	165mm x 220mm
DISCHARGE CHUTE	280 degrees rotation
HYDRAULIC OIL CAPACITY	33 litres
HOURLY METER	Standard
LENGTH (TRANSPORT)	3185mm max
WIDTH	1480mm max
HEIGHT	2485mm max
WEIGHT	750 Kg
SOUND POWER LWA	115dB(A)
SOUND PRESSURE LPA	92dB(A)

SUPPORT & FINANCE

3 YEAR
WARRANTY
AS STANDARD

WARRANTY:

GreenMech offers an industry-leading 3 year unlimited, “no quibble” Parts and Labour warranty.

NATIONWIDE
DEALER
NETWORK

NATIONWIDE DEALER NETWORK:

GreenMech supports its UK customers via an unrivalled network of dealers, providing local knowledge and expertise in both sales and aftersales areas.

GREENMECH
FINANCE

FINANCE:

GreenMech Finance can provide a package of finance options to UK customers to maximise their investment and optimise their cash flow.



The Mill Industrial Park, Kings Coughton, Alcester B49 5QG
01789 400 044 www.greenmech.co.uk

#EVO165

FOLLOW US

