
QuadChip 160D Where high-risk jobs are a priority



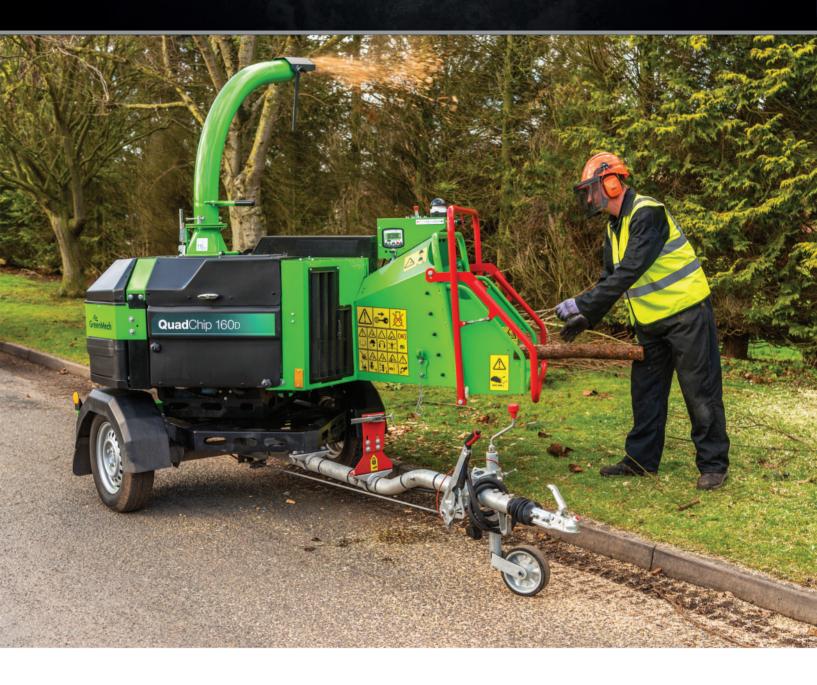

Customer category

Arborist • Landscaper • Contractor

This specialist, road-tow chipper is designed specifically for work in high-risk areas, where the entire chipper unit can swivel 360 degrees on the chassis, so that operators can position the in-feed chute away from the roadside, therefore enhancing road and operator safety. This is a hungry machine, powered by a 25hp diesel engine and is specified as having an under-750kg towing weight.

The backbone of the QuadChip 160D design is based on a deep beam, high tensile steel chassis which creates tremendous strength and ensures a robust performance. A generous in-feed hopper, measuring 1100mm x 800mm, means that free-flow of bulky material can be handled without having to trim to a more manageable size. As the material passes through massive 160mm x 230mm twin, hydraulically powered feed rollers, the patented electronically controlled No-Stress system automatically manages the throughput of material to maximise chipping efficiency.

QuadChip 160D

Technical Specification...



Key features 160mm chipping capacity Full 360° turntable 25hp Kubota diesel engine Disc-Blade chipping technology Twin hydraulic feed rollers No-Stress power control Bottom-bar safety mechanism Sub 750kg towing weight









Capacity	160mm
Engine Make	Kubota
Engine	25hp diesel
Fuel	Diesel
Tractor Required	N/A
Chipping Flywheel	Disc Type
Flywheel Speed	2200rpm
Blades	4
Hydraulic Feed Rollers	Twin Vertical
Turntable	Standard
Power Control	No-Stress
Fuel Capacity (engine)	32 L
Tyre Size (towed)	155/80/R13
Spare Wheel	Optional

Tonnes per hour	3.5
Infeed Chute Aperture	1100mm × 800mm
Infeed Throat Size	160mm x 230mm
Discharge Chute	280° Rotation
Hydraulic Oil Capacity	32 L
Clutch	N/A
Hour Meter	Standard
Length (transport)	3211mm
Width (transport)	1502mm
Height	2545mm
Weight	749kg
Sound Power LWA	116dB(A)
Sound Pressure LPA	92dB(A)